



LSA-PLUS® Insertion Tool with Sensor

The standard tool used for all LSA-PLUS series, as well as for RJ45 jacks. For termination of wires with the conductor diameter range (0.35...0.9 mm) and overall diameter range (0.7...2.6 mm). When a second lead is terminated in a contact the wire position sensor is deactivated (wire specifications and the number of wires depend on the type of connection technology used). The scissor can be deactivated so that a jumper wire can be through-connected to neighbouring contacts.


Features and Benefits

- Service Life
 - 0.4mm wire: 200,000 connections
 - 0.6mm wire: 100,000 connections
 - 0.8mm wire: 50,000 connections
- Wire end-position detection (sensor)
- Scissor
- Cutting inhibitor clip
- Extraction hook
- Blade

LSA-PLUS® Insertion Tool with Sensor

Ordering Information

Description	Catalogue Number
LSA-PLUS® insertion tool S	6417 2 055-01

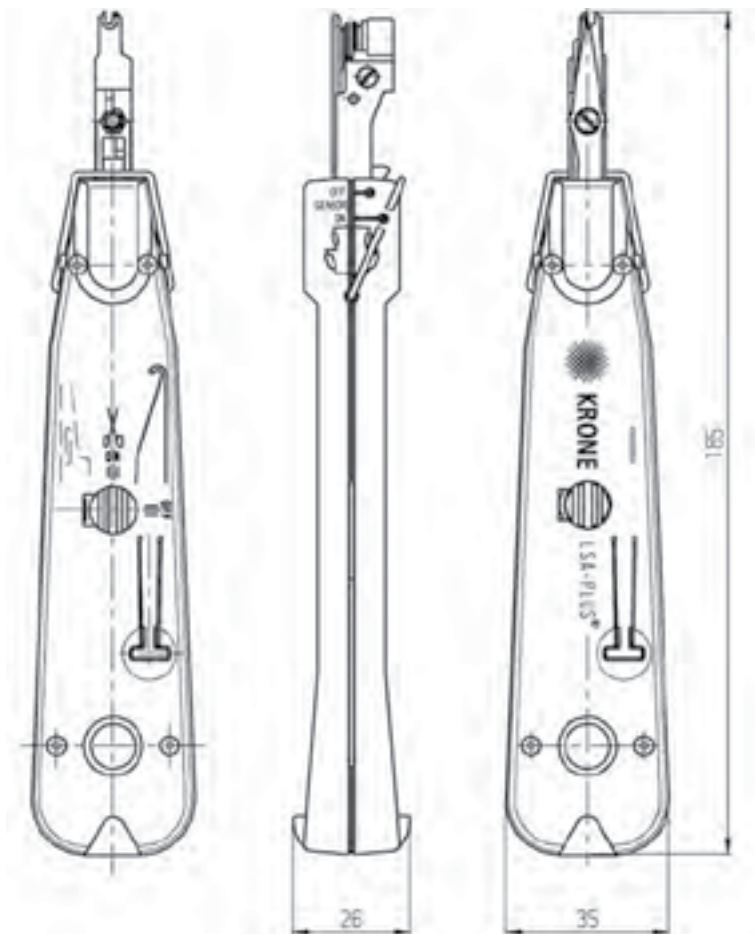

Dimensions, in mm

COMMSCOPE®

www.commscope.com

Visit our website or contact your local CommScope representative for more information.

© 2015 CommScope, Inc. All rights reserved.

LSA-PLUS and all trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope, Inc.

This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services.

PS-102199.1-BE (01/16)