

Model: 6-FM-40

GP SERIES

General Features

- Better discharge characteristic than normal VRLA batteries.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- Higher safety & reliable construction.
- Extra durability and deep cycle ability for heavy demand applications
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Application

- Electric Powered Vehicles. Electric Powered Toys.
- Golf Cars and Buggies. Control System.
- Wheel chairs. Vacuum Cleaners.
- Power tools. Medical Equipments.



General Characteristics



Battery Model	6-FM-40			
Designed Cycle life	8Years			
Capacity(25°C)	20HR(2A,1.75V)	10HR(3.9A,1.75V)	5HR(6.8A,1.75V)	1HR(25A,1.75V)
	40AH	39AH	34AH	25AH
Dimensions	Length	Width	Height	Total Height
	197mm(7.76inch)	165mm(6.50inch)	170mm(6.69inch)	170mm(6.69inch)
Approx. Weight	13.5Kg (29.8 lbs)			
Internal resistance	Full charged at 25°C :0.0095 Ohm			
Self discharge	3% of capacity declined per month at 25°C			
Capacity affected by temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle use			Float use
	14.4-14.8V(-30mV/°C),max. Current: 10A			13.6-13.8(-20mV/°C)

Constant current discharge ratings-amperes at (25°C)





F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	140	96.0	70.0	42.0	26.4	10.9	7.63	4.24	2.11
1.67V	126	87.6	68.0	40.8	26.4	10.9	7.57	4.18	2.10
1.70V	120	84.4	65.6	40.0	26.3	10.9	7.57	4.15	2.10
1.75V	106	78.0	62.0	39.2	26.0	10.8	7.51	4.07	2.09
1.80V	96.0	72.4	59.2	38.0	25.7	10.8	7.45	4.00	2.02
1.85V	72.8	59.6	51.2	35.0	25.4	10.7	7.38	3.93	1.90

Constant power discharge ratings-watts at (25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
1.60V	231	159	124	79.2	52.0	21.0	14.6	8.48	4.22
1.67V	219	157	123	77.6	50.3	21.0	14.6	8.36	4.20
1.70V	204	153	121	75.6	49.0	21.0	14.6	8.29	4.20
1.75V	190	143	114	73.6	48.5	20.6	14.4	8.15	4.18
1.80V	171	133	107	71.6	47.7	20.4	14.2	8.01	4.03
1.85V	137	110	93.2	65.6	47.2	20.3	14.0	7.87	3.79

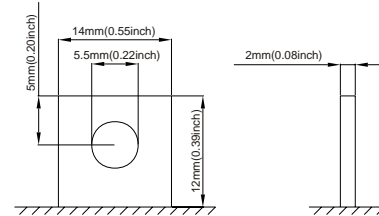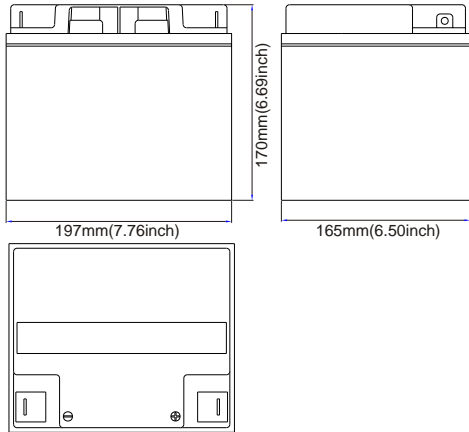

Terminal Dimensions

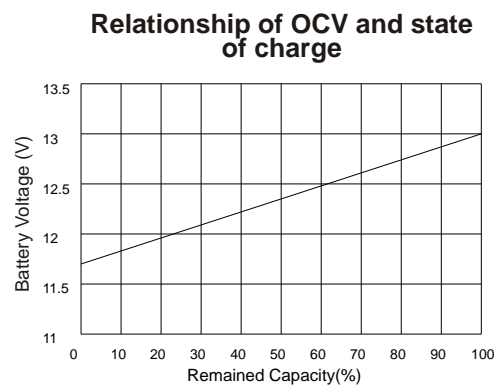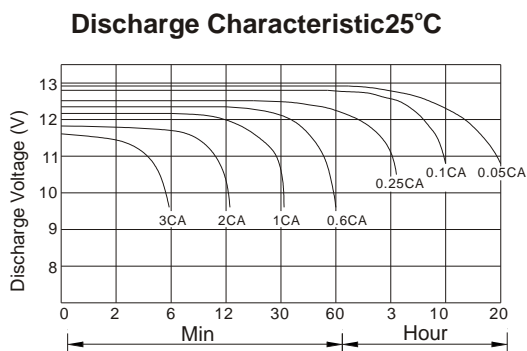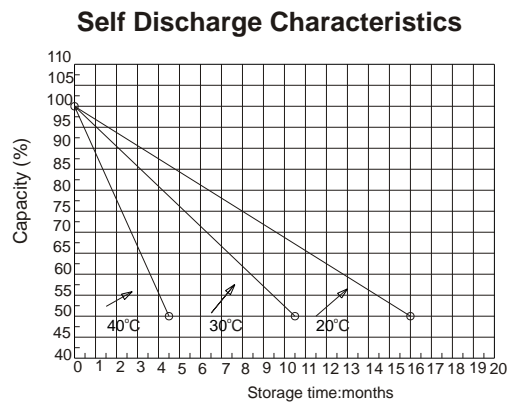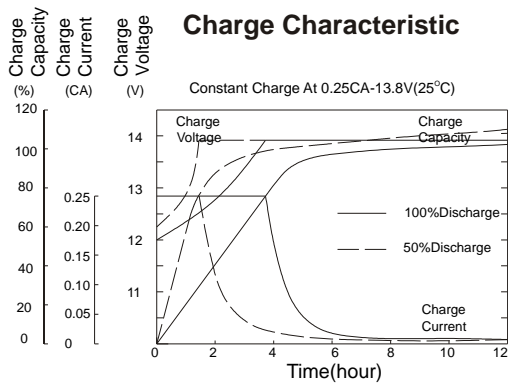

NARADA POWER SOURCE CO.,LTD.
No.459 Wensan Road, Hangzhou, Zhejiang, P.R.China
Tel: +86-571-28827013 Fax: +86-571-85126942
Website:www.naradabattery.com E-mail: intl@narada.biz

