

## FIST-SCO2

### FIST sewage closure organizer

The Sewage Closure Organizer, FIST-SCO2 is the environmentally sealed enclosure for the fiber management system that provides the functions of splicing and passive component integration in the external network.

This slim metal closure is specially designed to fit in small sewage canal systems and is therefore resistant to very aggressive environments.

### Features


- Single ended design
- Base and dome are made in AISI 316L stainless steel and are sealed with an O-ring under controlled compression
- Base and dome contain fixation holes to mount the closure against the wall
- 6 or 10 round entry/exit ports for drop cables and 1 oval port for looped (uncut) cable
- Heat-shrinkable cable seals
- The base has an earthing provision and a 'flash test' valve
- The UMS (Universal Mounting System) profiles provide the foundation for mounting combinations of SOSA2 (Splicing Only Sub-Assembly) and/or SASA2 (Splitter Array Sub-Assembly) modules, which consist of a modular groove plate and trays
- The FIST MK2 organizer system allows fiber management in a single circuit or single element way
- Uncut fibers can be stored as single circuits in SC trays, as single element in SE trays or as loose buffer tubes at the back side of the UMS profile
- FIST-SCO2 with 10 ports specifically developed for loose tube cable, whereas the FIST-SCO2 with 6 ports is compatible with most common cable types: e.g. loose tube, central core, microsheath cable
- The closure can be used as well in aerial, pedestal and underground (up to 5 meters) environment

# FIST-SCO2

FIST sewage closure organizer

## Dimensions and capacity

	BE06 or BE10	
<b>Dimensions (in mm)</b>		
<b>L (length including caps on cable ports)</b>	750	
<b>W1 (width at base)</b>	285	
<b>W2 (width at the top of dome)</b>	259	
<b>D1 (depth at the base)</b>	147	
<b>D2 (depth at the dome handle)</b>	142	
<b>UMS profile data</b>		
<b>UMS profile length (units)</b>	1 x 48 *	
<b>Splicing capacity (in # fibers)</b>	Fibers	Trays
<b>Single Circuit, primary coated</b>	96	48
<b>Single Element, primary coated (8 fibers/tray)</b>	192	24
<b>Single Element, primary coated (12 fibers/tray)</b>	288	24

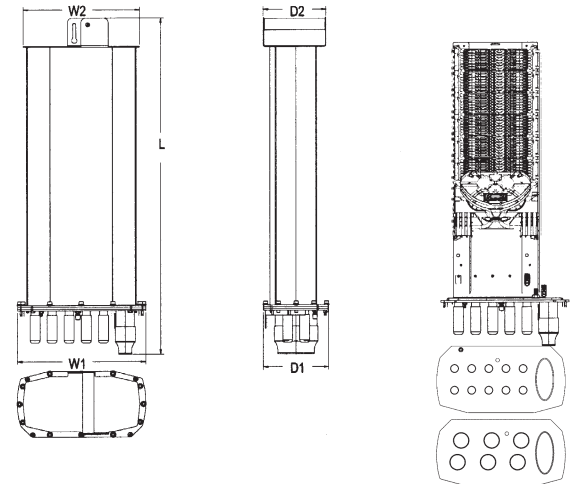

### Cable ports

<b>1 Oval port for 2 cables with <math>\varnothing</math> range each</b>	12-25 mm
<b>6 Round ports for 1 cable each with <math>\varnothing</math> range</b>	5-25 (30) mm**
<b>10 Round ports for 1 cable each with <math>\varnothing</math> range</b>	5-15 mm

\*Capacity up to 60 units is possible for special applications. Please contact your local Sales Engineer.

\*\*FIST-SCO2-BE6 has 6 round drop ports for cables up to 25 mm (in case of a cable bracket in the metal port) or 30 mm in case of standard loose tube cable. This closure can also handle central core cable.

## Ordering information

FIST-SCO2- BE XX

**Number of round ports**

06	6 round ports
10	10 round ports

For more technical options and order quantity information, please consult the products ordering guides or your local sales representative.



[www.commscope.com](http://www.commscope.com)

Visit our website or contact your local CommScope representative for more information.

© 2016 CommScope, Inc. All rights reserved.

FIST and all trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope, Inc. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services.

PS322796EU (03/16) previously TC 562/DS/3